


PHASE TECH™

Introduces the NEW 235ES

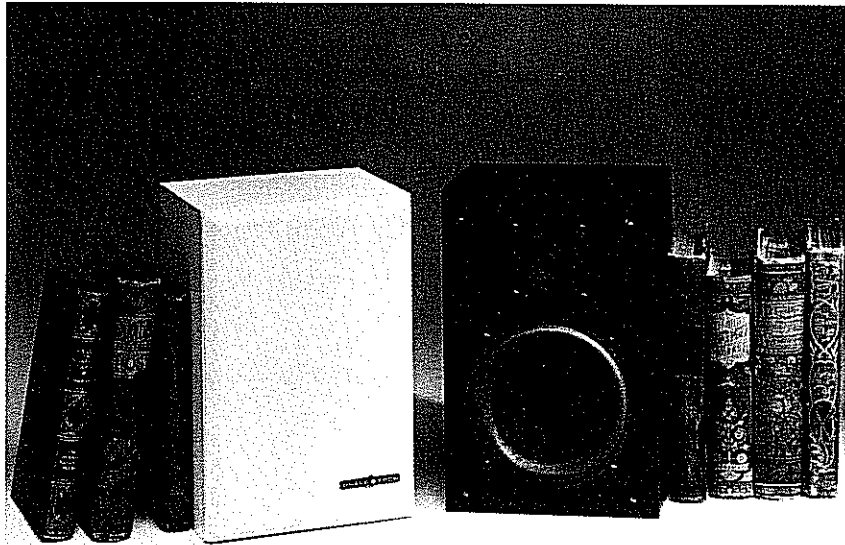

Specifications

DRIVERS:

Low frequency 5 1/4" cone

High frequency 2 1/4" cone

CROSSOVER FREQ. 3.5 kHz

FREQUENCY RANGE 70-20,000 kHz \pm 3 dB

SENSITIVITY 89 dB

RECOMMENDED

AMP POWER 5-40 watts

IMPEDANCE 8 OHMS

DIMENSIONS 9 3/4" H x 6 1/2" W x 5 3/4" D

SHIPPING WEIGHT 17 Lbs. Pair

The **235ES** offers a combination of accurate reproduction, wide dynamic range and superb imaging rarely heard from speakers in its price range. Its sensitivity of 89 dB means it can be powered by amplifiers and receivers with as little as 5 watts per channel and still deliver clean, detailed sound at realistic volume levels. And its compact acoustic-suspension enclosure is designed to produce well-controlled bass response to 70 Hz.

Before you buy any speaker in this price range, audition the **235ES** at your Phase Technology dealer. Hear how much more sound you can get for your money.