


# PHASE VELOCITY

V52 • V62 • V626 • V5520 • V-SURROUND-II

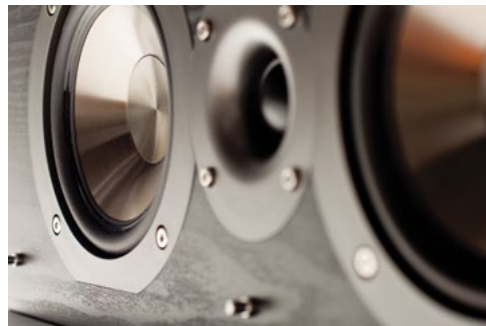

Named for its stylish and streamlined exterior, the Phase Velocity series delivers incredibly accurate audio reproduction. The series includes bookshelf, tower, and surround models, providing a speaker for any need in any room.

### *Superior Technology*

An alluring speaker means nothing without sound quality to match. Simply put, these speakers sound just as stunning as they look. Phase Technology's patented soft dome tweeter reproduces silky smooth and

defined high frequencies, making it the perfect complement to the VDT™ (Vapor Deposited Titanium) woofer that produces extraordinary bass and mids. The VDT drivers are extremely light, giving you great, quick movement and excursion, while also being incredibly dense so you don't have any diffraction in and out of the speaker cabinet muddying the audible signal. Featuring PhaseTech's signature Absolute Phase® Crossovers, Velocity speakers ensure that you will get incredible performance at an affordable price.

# PHASE VELOCITY

V52 • V62 • V626 • V5520 • V-SURROUND-II



## V52

Description: 2-Way Bookshelf  
Tweeter: 1" Patented Woven Synthetic Soft Dome  
Woofer: 5.25" VDT™ w/ NBR Surround  
Frequency Response: 58 Hz - 20 kHz  
Sensitivity: 88 dB  
Impedance: 8Ω  
Power Handling: 15-100 Watts  
Dimensions: 10.75" H x 7.4" W x 8.53" D  
Weight: 9 lbs.  
In-Ceiling/In-Wall Pairings: CS-6R, CS-6R DVT, CI6.0 IX QM Kit, CI20X



## V5520

Description: 2-Way LCR/Center Channel  
Tweeter: 1" Patented Woven Synthetic Soft Dome  
Woofer: 5.25" VDT™ w/ NBR Surround  
Bass Radiator: 5.25" VDT™ w/ NBR Surround  
Frequency Response: 58 Hz - 20 kHz  
Sensitivity: 88 dB  
Impedance: 8Ω  
Power Handling: 15-100 Watts  
Dimensions: 7.4" H x 18" W x 8.53" D  
Weight: 11 lbs.  
In-Ceiling/In-Wall Pairings: CS-6R, CS-6R DVT, CI6.0 IX QM Kit, CI20X



## V62

Description: 2-Way Bookshelf  
Tweeter: 1" Patented Woven Synthetic Soft Dome  
Woofer: 6.5" VDT™ w/ NBR Surround  
Frequency Response: 45 Hz - 20 kHz  
Sensitivity: 88 dB  
Impedance: 8Ω  
Power Handling: 15-125 Watts  
Dimensions: 13.25" H x 8.25" W x 9.53" D  
Weight: 11 lbs.  
In-Ceiling/In-Wall Pairings: CS-6R, CS-6R DVT, CI6.0 IX QM Kit, CI20X



## V-SURROUND-II

Description: 2-Way Switchable Bipole/Dipole Surround  
Tweeters: (2) 1" Patented Woven Synthetic Soft Domes  
Woofer: 5.25" VDT™ w/ NBR Surround  
Frequency Response: 70 Hz - 20 kHz  
Sensitivity: 88 dB  
Impedance: 8Ω  
Power Handling: 15-100 Watts  
Dimensions: 9" H x 11.94" W x 4.5" D  
Weight: 7 lbs.



## V626

Description: 3-Way Tower  
Tweeter: 1" Patented Woven Synthetic Soft Dome  
Woofer: (2) 6.5" VDT™ w/ NBR Surround  
Frequency Response: 32 Hz - 20 kHz  
Sensitivity: 89 dB  
Impedance: 8Ω  
Power Handling: 15-150 Watts  
Dimensions: 40.5" H x 8.25" W x 9.53" D  
Weight: 24 lbs.  
In-Ceiling/In-Wall Pairings: CS-8R, CI6.0 IX QM Kit, CI20X